



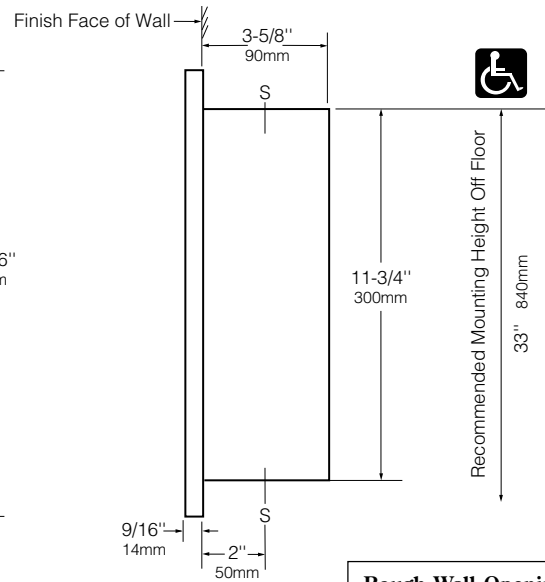

Technical Data

# RECESSED SANITARY NAPKIN DISPOSAL

# B-3513

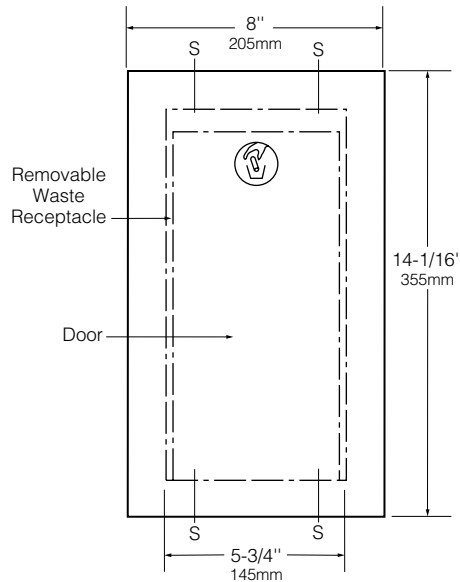

<b>Rough Wall Opening</b>
6" (150mm) wide
12" (305mm) high
3-3/4" (95mm) minimum recessed depth

### MATERIALS:

**Door** — 18-8 S, type-304, 22-gauge (0.8mm) stainless steel with satin finish. 9/16" (14mm) 90° return for maximum rigidity. Equipped with concealed, full-length stainless steel piano-hinge at bottom. International graphic symbol identifies napkin disposal.

**Cabinet** — 18-8 S, type-304, heavy-gauge stainless steel, all-welded construction.

**Waste Receptacle** — Leak-proof, rigid molded plastic. Removable for servicing. Capacity: 0.6 gal. (2.3 L).

### OPERATION:

Door pulls down to open. Disposal is emptied by opening door and removing receptacle.

### INSTALLATION:

Provide framed rough wall opening 6" wide x 12" high (150 x 305mm). Minimum recessed depth required to finish face of wall is 3-3/4" (95mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall. Coordinate with mechanical engineer to avoid pipes, vents, and conduits. Mount cabinet with shims between framing and cabinet at points indicated by an S, then secure unit with #8 x 1/4" (4.2 x 32mm) sheet-metal screws (not furnished).

### SPECIFICATION:

Recessed sanitary napkin disposal shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Door with 9/16" (14mm) 90° return shall be equipped with a full-length stainless steel piano-hinge and shall have an international graphic symbol identifying napkin disposal. Unit shall be furnished with leak-proof, rigid molded plastic waste receptacle. Receptacle shall have a capacity of 0.6 gal. (2.3 L). Manufacturer's service and parts manual shall be provided to the building owner/manager upon completion of project.

**Recessed Sanitary Napkin Disposal shall be Model B-3513 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment of Canada Ltd., Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.**